


Low PIM Waveguide to Coaxial Adapter Series 098

Features

- **Low PIM**
- **Models 1.72GHz to 40 GHz**
- **Low VSWR**
- **Low insertion loss**
- **Connector Options include:**
Type N
K Connector (2.92mm)
7-16 DIN
- **Minimal junctions/surface materials**
- **Low Outgassing (TML <1% CVCH <0.1%)**
- **Grounded center conductor**
- **Precision Air Line Connector**



Model: 12098-NF CPR187G

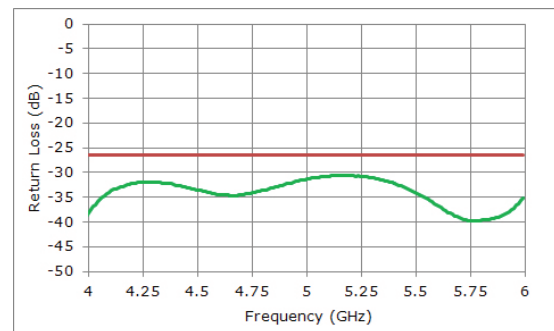

Typical Return Loss for Model 12098-NF10

The Flann Series 098 Waveguide to Coaxial Adapters have been designed and constructed to provide optimally low levels of Passive Intermodulation (PIM)

Standard connector types include:
Type N, K Connector and 7-16 DIN

For High Power Models please see series 097

Ordering

Please specify the following:

WG designation	Series	-	Coax Connector	Gender	XX	Flange
08 - 22	098		N, K, D	F (Female) or M (Male)	N & D = 10 K = 20	See flann.com

Example: 17098-NF10 UBR120 A WG17 (WR75) Low PIM Waveguide to Coax Adapter with N-type female coax connector with UBR 120 flange

Low PIM Waveguide to Coaxial Adapter Series 098

Microwave Specifications

Waveguide Designation			Frequency (GHz)	Coaxial Connector Options			VSWR max	Insertion Loss max (dB)
WG	R	WR		D	N	K		
8	22	430	1.72 - 2.61	•			1.1	
9A	26	340	2.17 - 3.30	•				
10	32	284	2.60 - 3.95	•	•			
11A	40	229	3.22 - 4.90	•	•		0.12	
12	48	187	3.94 - 5.99	•	•			
13	58	159	4.64 - 7.05	•	•			
14	70	137	5.38 - 8.18		•	•	0.15	
15	84	112	6.58 - 10.0		•	•		
16	100	90	8.20 - 12.5		•	•		
17	120	75	9.84 - 15.0		•	•		
18	140	62	11.9 - 18.0		•	•	0.20	
19	180	51	14.5 - 22.0			•		
20	220	42	17.6 - 26.7			•		
21	260	34	21.7 - 33.0			•		
22	320	28	26.4 - 40.1			•		

Waveguide Designation	Insertion Loss (Db)
7-16 DIN	D
Type N	N
K Connector (2.92 mm)	K

Environmental Specifications

- Operating ambient temperature : 30⁰ C to 70⁰ C
- Non operating ambient temperature: -40⁰ C to 80⁰ C
- TML (Total Mass Loss) : <1%
- CVCM (Collected Volatile Condensable Mass) : <0.1%

Construction

- D option - Aluminium and Chromate Passivation
- N option - Aluminium and Chromate Passivation
- K option - Brass and Gold Plate