

# Precision Low Power Terminations Series 040




Model 19040

## Features

- **Low VSWR**
- **Models from 1.14 GHz to 500 GHz**

Flann series 040, precision - low power terminations have a very low VSWR which makes them eminently suitable for use in VSWR measurements.

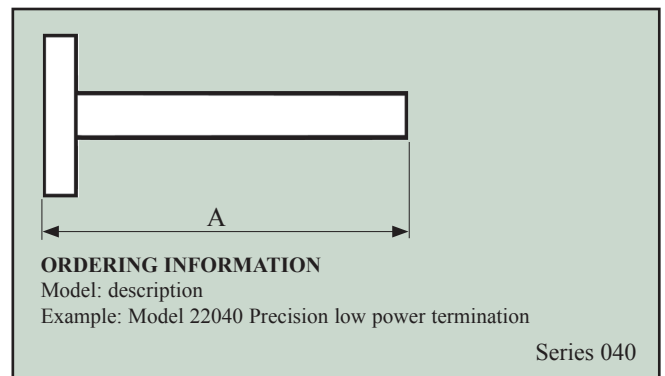

Model	Frequency Range (GHz)	Waveguide				VSWR (better than)	Max Mean CW Power (Watts)	Dimension A (mm)	Weight (kg)
		WG	WM	R	WR				
06040	1.14 - 1.73	6	-	14	650	1.01	30	On Request	On Request
08040	1.72 - 2.61	8	-	22	430	1.01	20		
09A040	2.17 - 3.3	9A	-	26	340	1.01	15	382	3.2
10040	2.60 - 3.95	10	-	32	284	1.01	10		
11A040	3.22 - 4.90	11A	-	40	229	1.01	6	347	1.65
12040	3.94 - 5.99	12	-	48	187	1.01	5	302	1.25
13040	4.64 - 7.05	13	-	58	159	1.01	4	282	1.15
14040	5.38 - 8.18	14	-	70	137	1.01	3	252	1.0
15040	6.58 - 10.0	15	-	84	112	1.01	2	202	0.75
16040	8.20 - 12.5	16	-	100	90	1.015	1	192	0.45
17040	9.84 - 15.0	17	-	120	75	1.015	0.75	152	0.26
18040	11.9 - 18.0	18	-	140	62	1.02	0.75	132	0.18
19040	14.5 - 22.0	19	-	180	51	1.02	0.75	112	0.13
20040	17.6 - 26.7	20	-	220	42	1.02	0.75	82	0.08
21040	21.7 - 33.0	21	-	260	34	1.02	0.75	78	0.07
22040	26.4 - 40.1	22	-	320	28	1.02	0.50	78	0.05
23040	33.0 - 50.1	23	-	400	22	1.02	0.50	66	0.04
24040	39.3 - 59.7	24	-	500	19	1.025	0.50	52	0.03
25040	49.9 - 75.8	25	-	620	15	1.025	0.40	42	0.03
26040	60.5 - 92.0	26	-	740	12	1.03	0.40	35	0.02
27040	73.8 - 112	27	-	900	10	1.03	0.30	30	0.015
28040	92.3 - 140	28	-	1200	8	1.04	0.20	25	0.015
29040	114 - 173	29	-	1400	6	1.05	0.15	20	0.015
30040	145 - 220	30	-	1800	5	1.06	0.12	20	0.015
31040	172 - 261	31	-	2200	4	1.08	0.10	20	0.015
32040	217 - 330	32	-	2600	3	1.1	0.08	20	0.015
710040	260 - 400	-	710	-	'2.8'	1.12	0.07	On Request	On Request
570040	330 - 500	-	570	-	'2.2'	1.15	0.05		

For standard flange types and recommendations see pages 118 onwards