



Features


- **40 dB Stop Band Rejection**
- **Models Available from 2.6 GHz to 112 GHz.**
- **High Frequency Models Available on Request**

Low pass filters simplify measurements in microwave systems and enhance system performance by effectively reducing undesirable signals, i.e., harmonics, to an acceptably low level.

All models provide a very wide 'stop band' of frequencies above the recommended waveguide band. The pass band VSWR is generally better than 1.5:1 and insertion loss less than 1.5 dB.

Filters of this type are particularly suitable for applications involving swept or slotted line measurements.

A range of standard models is available as detailed below. Customised and special models can be combined with other devices. For example, a low pass filter combined with waveguide to coax adaptor can also be supplied

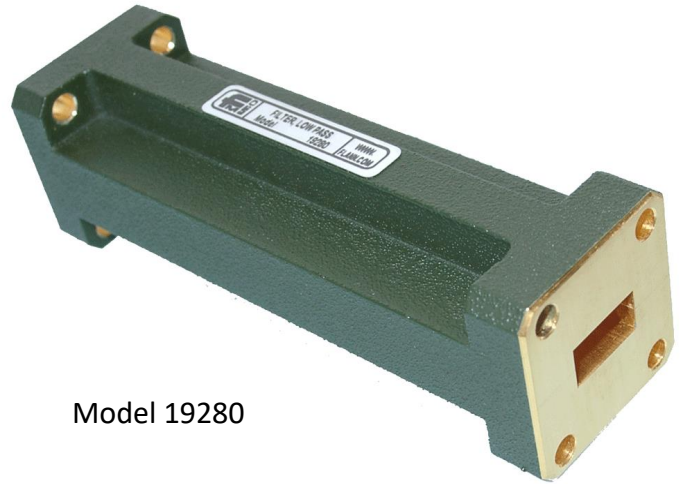

Model 19280

FLANN MICROWAVE LTD.

Dunmere Road
Bodmin
Cornwall
PL31 2QL

GET IN TOUCH:

Tel: +44 (0)1208 77777
sales@flann.com
www.flann.com



Low Pass Filters


Series 280

Model	Waveguide			Passband Frequency Range (GHz)	Stop Band Frequency Range (GHz)	Stop Band Rejection (dB)	Maximum Insertion Loss (dB)	VSWR Generally better than	Dimension A (mm)
	WG	R	WR						
10280	10	32	284	2.60 - 3.95	5.20 - 11.85	>40	0.5	1.15	500
11A280	11A	40	229	3.22 - 4.90	6.60 - 14.70	>40	0.5	1.15	450
12280	12	48	187	3.94 - 5.99	7.88 - 17.97	>40	0.5	1.15	375
14280	14	70	137	5.38 - 8.18	10.76 - 24.54	>40	0.5	1.15	250
15280	15	84	112	6.58 - 10.0	13.16 - 30.00	>40	0.5	1.15	215
16280	16	100	90	8.20 - 12.5	16.40 - 37.50	>40	0.5	1.15	160
17280	17	120	75	9.84 - 15.0	19.68 - 45.00	>40	0.5	1.15	140
18280	18	140	62	11.9 - 18.0	23.80 - 54.00	>40	0.5	1.15	110
19280	19	180	51	14.5 - 22.0	29.00 - 66.00	>40	0.5	1.15	100
20280	20	220	42	17.6 - 26.7	35.20 - 80.10	>40	0.5	1.15	80
21280	21	260	34	21.7 - 33.0	43.4 - 99.0	>40	0.5	1.2	80
22280	22	320	28	26.4 - 40.1	52.80 - 120.3	>40	0.75	1.2	60
23280	23	400	22	33.0 - 50.1	66.00 - 150.3	>38	1.0	1.3	50
24280	24	500	19	39.3 - 59.7	78.60 - 179.1	>38	1.0	1.3	50
25280	25	620	15	49.9 - 75.8	99.8 - 227.4	>38	1.0	1.4	35
26280	26	740	12	60.5 - 92.0	102.5 - 184	>40	0.6	1.5	15
27280	27	900	10	73.8 - 112	128 - 224	>40	0.4	1.66	12

ORDERING INFORMATION

Model: Description

Example: Model 22280 Low pass filter



Models are available at higher frequency bands. Details upon request.

Series 280

Custom Design

Custom built instruments can be supplied; please contact the sales team for more information

sales@flann.com

FLANN MICROWAVE LTD.

Dunmere Road
Bodmin
Cornwall
PL31 2QL

GET IN TOUCH:

Tel: +44 (0)1208 77777
sales@flann.com
www.flann.com