



Features

- **Models from 1.14 GHz to 140 GHz**

The Flann series 390 range of un-matched Hybrid Tees are waveguide sections accurately machined and assembled to form a conventional hybrid tee junction.

Precise machining yields the symmetrical construction necessary to ensure high isolation between the E and H plane ports and balanced power division in the “through” waveguide.

The H plane input provides in-phase outputs whilst the E plane input provides outputs of opposite phase.

Un-Matched Hybrid Tees are available in lower frequency bands, details on request.



Model 24390

Model	Frequency Range (GHz)	Waveguide			Dimensions (mm)	
		WG	R	WR	A	B
20390	17.6 - 26.7	20	220	42	70	35
22390	26.4 - 40.1	22	320	28	70	35
23390	33.0 - 50.1	23	400	22	70	35
24390	39.3 - 59.7	24	500	19	70	35
25390	49.9 - 75.8	25	620	15	48	24
26390	60.5 - 92.0	26	740	12	48	24
27390	73.8 - 112	27	900	10	48	24
28390	92.3 - 140	28	1200	8	48	24

FLANN MICROWAVE LTD.

Dunmere Road
Bodmin
Cornwall
PL31 2QL

GET IN TOUCH:

Tel: +44 (0)1208 77777
sales@flann.com
www.flann.com



FLANN MICROWAVE


Un-Matched Hybrid Tees

Series 390

ORDERING INFORMATION

Model: Description

Example: Model 22390 Hybrid Tee, Un-matched

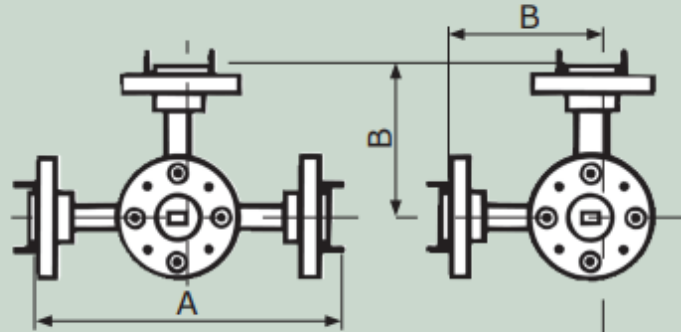

Series 390

FLANN MICROWAVE LTD.

Dunmere Road
Bodmin
Cornwall
PL31 2QL

GET IN TOUCH:

Tel: +44 (0)1208 77777
sales@flann.com
www.flann.com